


AXK4 Series

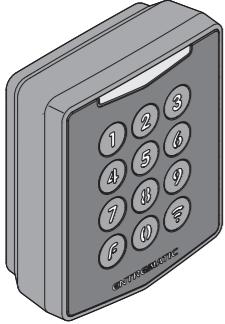

Istruzioni complete - Complete instructions

Vollständige Anweisungen - Instructions complètes

Instrucciones completas - Instruções completas

Fullständiga instruktioner - Komplette instruktioner

Fullstendige instruksjoner - Täydelliset ohjeet




IP2309 - 2018/06/21



Entrematic Group AB
Lodjursgatan 10
SE-261 44, Landskrona
Sweden
www.entrematic.com

	AXK4	AXK4P/PS
Frequenze operative - Operating frequency - Betriebsfrequenzen - Fréquences de fonctionnement - Frecuencias operativas - Frequências operativas - Driftsfrekvenser - Aktive frekvenser - Driftsfrekvens - Työtaajuudet	433,92 MHz	868,35 MHz
Potenza irradiata - Radiated Power - Strahlungsleistung - Puissance rayonnée - Potencia radiada - Potência irradiada - Utstrålad effekt - Utstrålt effekt - Säteilytaho	< 1 mW	< 1 mW
Protocollo di trasmissione Transmission protocol Übertragungsprotokoll Protocole de transmission Protocolo de transmisión	Rolling code Protocolo de transmissão Överföringsprotokoll Transmissionprotokoll Overføringsprotokoll Lähetyspotokolla	AES-128 encrypted
Canali disponibili Available channels Verfügbare Kanäle Canaux disponibles Canales disponibles	4 (CH1, CH2, CH3, CH4)	
Distanza - Range - Abstand - Distance - Distancia - Distância - Avstånd - Distance - Distanse - Etäisyys	50 m - 150 m	
Alimentazione - Power supply - Stromversorgung - Tension - Alimentación - Alimentação - Strömförserjning - Forsyning - Forsyning - Syöttö	9 volt alkaline battery, 6LR61 ! LITHIUM LITHIUMION	
Alimentazione esterna [*] - External power supply [*] - Externe Stromversorgung [*] - Alimentation externe [*] - Alimentación externa [*] - Alimentação externa [*] - Extern strömförserjning [*] - Eksterne strömforsyning [*] - Ekstern forsyning [*] - Ulkoinen syöttö [*]	12 - 24 volt DC	
Grado di protezione - Protection degree - Schutzgrad - Degré de protection - Grado de protección - Grau de proteção - Skyddsgrad - Beskyttelsesgrad - Beskyttelsegrad - Suojausluokka	IP55	
Range temperatura di utilizzo (°C) - Operating temperature range (°C) - Betriebstemperaturbereich (°C) - Plage de température d'utilisation (°C) - Intervalo de temperatura de uso (°C) - Faixa de temperatura de utilização (°C) - Temperaturintervall för användning (°C) - Driftstemperaturinterval (°C) - Temperaturintervall for bruk (°C) - Käyttölämpötila-alue (°C)	-20°C - +50°C	
Peso - Weight - Gewicht - Poids - Peso - Peso - Vikt - Vægt - Vekt - Paino	165 g	


Destinazione d'uso - Intended use
Verwendungszweck - Destination d'usage
Uso previsto - Utilização prevista
Avsedd användning - Tilsiget bruk
Tiltenkt bruk - Käyttötarkoitus

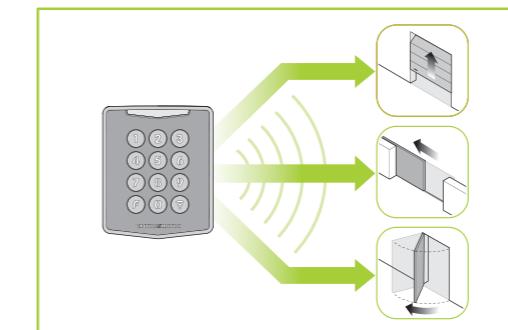

Codici di fabbrica - Factory default numerical codes
Fabrikcodes - Codes d'usine - Códigos de fábrica - Códigos de fábrica - Fabrikskod - Fabrikskoder
Fabrikkoder - Tehtaan koodit

CH1	3	3	3	3
CH2	4	4	4	4
CH3	6	6	6	6
CH4	7	7	7	7

Sequenza per cambio codici - Code change sequences - Sequenz für Code-Änderung - Séquence pour la modification des codes - Secuencia para cambio de códigos Sequência para a troca dos códigos - Sekvens för kodbytte - Sekvens til ændring af koder Sekvens for skifte av koder - Järjestys koodien vaihtoa varten

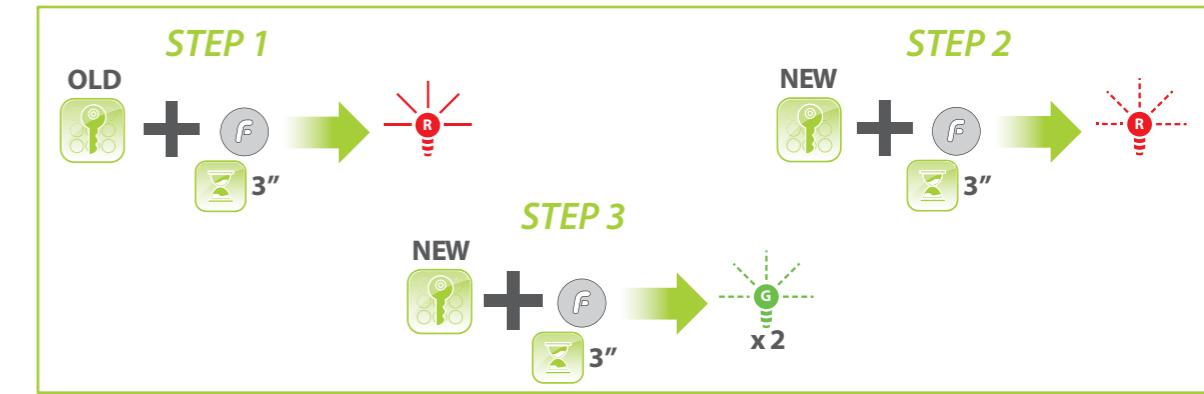

Attivare CHn - Activate CHn - CHn aktivieren - Activer CHn - Activar CHn
Ativar CHn - Aktivera CHn - Aktivér CHn - Aktiver CHn - Aktivoi CHn-kanavan

